


DON-JO MANUFACTURING, INC.

Latch Protectors

For Key-in-Knob Locksets on Outswinging Doors

Furnished with carriage bolts, washers & acorn cap nut for safety and strength.

- 12 ga. (.104) Steel
- Finishes—
LP-107: 630
LP-207: BP (Brass Plated),
DU (Duro Coated), SL (Silver Coated)




NUMBER	DIMENSIONS
LP-107	2-3/4" x 7"
LP-207	2-3/4" x 7"

Pin Latch Protectors for Outswinging Doors

Solid steel pin prevents spreading of door from frame. Pin is welded on back leaving no visible point of attack from outside. Fits 2-3/4" & 2-3/8" backsets.

- 12 ga. (.104) Steel
- Finishes—
PLP-111: 630
PLP-211: BP (Brass Plated),
DU (Duro Coated), SL (Silver Coated)

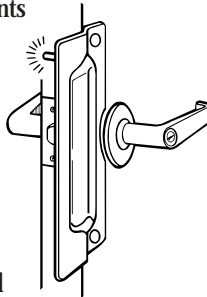


NUMBER	DIMENSIONS
PLP-111	3" x 11"
PLP-211	3" x 11"

Commercial Type for Outswinging Doors

6" for key-in-knobs. 10" for Mortise locks. Architectural design. Concealed welded studs with fasteners.

- 12 ga. (.104) Steel
- Finish—630




NUMBER	DIMENSIONS
CLP-106	2-1/8" x 6"
CLP-110	2-1/8" x 10"

Short Type for Outswinging Doors

Furnished with carriage bolts, washers and acorn cap nuts. May be used on hollow metal door/frame using ANSI strike.


- 12 ga. (.104) Steel
- Finishes—
SLP-206: 630
SLP-106: BP (Brass Plated),
DU (Duro Coated), SL (Silver Coated)

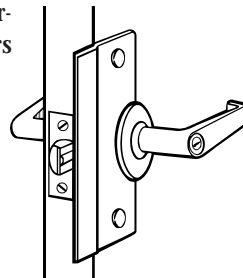

NUMBER	DIMENSIONS
SLP-106	2-1/2" x 6"
SLP-206	2-1/2" x 6"

The Interlock for Inswinging Doors

6" version for use with key-in-knob and deadbolt locks. 12" version for use with Mortise Locks, Simplex 1000 series, Alarm Lock DL-2500, DL-2700 & 3000, Card Access Systems, etc.

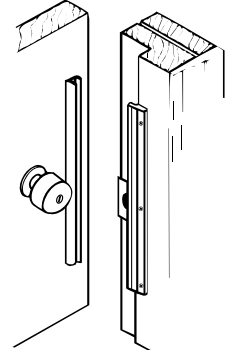


- 14 ga. (.075) Steel
- Finishes—BP (Brass Plated),
DU (Duro Coated), SL (Silver Coated)

NUMBER	DIMENSIONS
IIP-206	6"
IIP-212	12"

For Aluminum Entrance Doors—Solves Pull Handle Interference

Reversible. Fits over cylinder - lock removal NOT required. Hand carriage bolt and rivet required. No specific tools required. 3/8" offset.

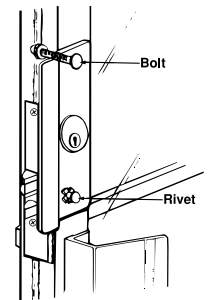


- 12 ga. (.104) Steel
- Finishes—630, DU (Duro Coated),
SL (Silver Coated)

NUMBER	DIMENSIONS
LP-307	2-5/8" x 7" x 1/8"

For Outswinging Doors— Completely Covers the Strike Plate

Furnished with carriage bolts, washers & acorn cap nuts for safety and strength. LP-111 is polybagged.

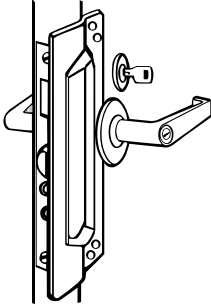


- 12 ga. (.104) Steel
- Finishes—
LP-111: 630
LP-211: BP (Brass Plated), PC (Prime Coated), DU (Duro Coated), SL (Silver Coated)

NUMBER	DIMENSIONS
LP-111	3" x 11"
LP-211	3" x 11"

For Use with Electric Strikes

Available with or without cylinder hole. Designed to fit most electric strikes. Completely encases the keeper for maximum protection.

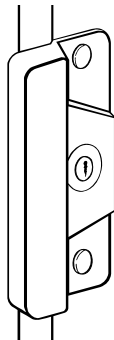

- 12 ga. (.104) Steel
- Finishes—
DU (Duro Coated),
SL (Silver Coated)


NUMBER	DIMENSIONS
ELP-208	3-1/2" x 8"
ELP-208P*	3-1/2" x 8"

*No Cylinder Hole

For Outswinging Aluminum Entrance Doors

Sex nuts and bolts for secure mounting and professional appearance.

- 12 ga. (.104) Steel
- Finishes—
DU (Duro Coated),
SL (Silver Coated)

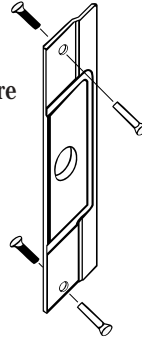


NUMBER	DIMENSIONS
AL-211	3-1/2" x 12"

Fits Adams Rite Latch Lock for Outswinging Doors

Reversible. 1/4" offset, 1-7/16" hole, 1-1/8" backset.

- 12 ga. (.104) Steel
- Finishes—
DU (Duro Coated),
SL (Silver Coated)




NUMBER	DIMENSIONS
LP-312	2-5/8" x 12" x 1/8"
LP-312P*	2-5/8" x 12" x 1/8"

*No Cylinder Hole

Fits Folger Adams Electric Strike for Outswinging Doors (Works with 310 series only)

Works with Folger Adams 310 Series.

- 12 ga. (.104) Steel
- Finishes—
FLP-111: 630
FLP-211: BP (Brass Plated), DU (Duro Coated)

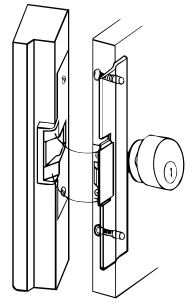


NUMBER	DIMENSIONS
FLP-111	1-3/4" x 11-1/4"
FLP-211	1-3/4" x 11-1/4"

For Access Controls on Outswinging Doors

Works with ILCO 1000, 4000; Alarm Lock Trilogy Locks and Mas-Hamilton Power Levers.

- 12 ga. (.104) Steel
- Finish—630
- Handed

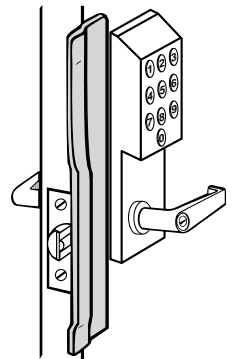


NUMBER	DIMENSIONS
KLP-110-LH	1-1/2" x 10"
KLP-110-RH	1-1/2" x 10"

DON-JO MANUFACTURING, INC.

Latch Protectors

Narrow Commercial Type for Outswinging Doors

6" for key-in-knob.
10" for Mortise Locks. Narrow type for outswinging doors.

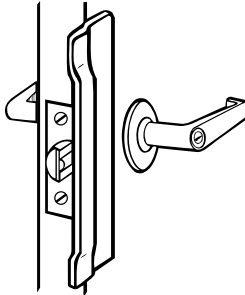


- 12 ga. (.104) Steel
- Finishes—
NLP-106, NLP-110: 630
NLP-206, NLP-210: BP (Brass Plated),
PC (Prime Coated), SL (Silver Coated)

NUMBER	DIMENSIONS
NLP-106	1-1/2" x 6"
NLP-110	1-1/2" x 10"
NLP-206	1-1/2" x 6"
NLP-210	1-1/2" x 10"

For Key-in-Lever Locks With up to 3-1/2" Rosette

Works with up to 3-3/4" rose.
Concealed welded studs with fasteners.

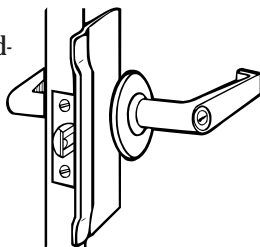


- 12 ga. (.104) Steel
- Finishes—
BLP-107: 630
BLP-207: BP (Brass Plated),
DU (Duro Coated), SL (Silver Coated)

NUMBER	DIMENSIONS
BLP-107	3-1/4" x 7"
BLP-207	3-1/4" x 7"

Angle Type for Outswinging Doors

6" for key-in-knob.
10" for Mortise Locks. 1-1/2" sheet metal screws for wood or metal.

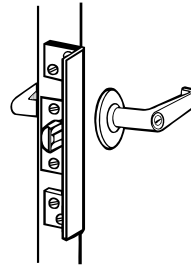


- 10 ga. (.134) Steel
- Finishes—
BC (Brass Coated),
DU (Duro Coated), SL (Silver Coated)

NUMBER	DIMENSIONS
ALP-206	6"
ALP-210	10"

Slimline for Outswinging Doors

Fasteners included.
Sleek appearance.

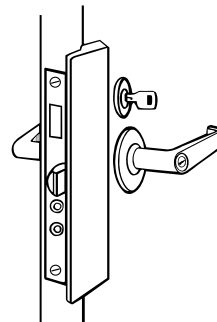


- 5/16" thick. (.3125) Steel
- Finishes—PC (Prime Coated),
DU (Duro Coated), SL (Silver Coated)

NUMBER	DIMENSIONS
LP-2878	1-1/2" x 8-1/8" x 5/16"

For Outswinging Doors - Completely Covers the Strike Plate

Furnished with carriage bolts, washers and acorn cap nuts for safety and strength.

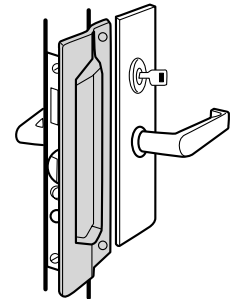

- 12 ga. (.104) Steel
- Finishes—
MLP-111: 630
MLP-211: SL (Silver Coated),
BP (Brass Plated),
DU (Duro Coated)

NUMBER	DIMENSIONS
MLP-111	3" x 11"
MLP-211	3" x 11"