

The High Quality, High Performance Strike

The HES 7000 is built to the highest standards of quality and perfection for high-security, high-usage applications. It features a pre-load release capability that allows the strikes to operate under significant door loading (fail secure mode only) as may be caused by a warped or misaligned door, weather stripping, smoke seal or any other door binding condition. 7000 Series strikes install easily in aluminum, wood, hollow or concrete filled metal jambs. There are five different option kits; the 701 ANSI 4-7/8" option and the 702 7-15/16" option, both of which accommodate cylindrical latchbolts up to 5/8" throw. The 783, 786 and 789 options accommodate rim mounted panic exit devices with up to 3/4" throw latchbolts.



Features

- UL Burglary Resistant Listed—Category 1034.
- Tamper Resistant—Heavy Duty Construction.
- Horizontal Adjustment (with lock down screws).
- Forcing Strength 1,000 lbs.
- Durability Minimum 500,000 Cycles.
- Field changeable Fail Secure/Fail Safe.
- Non-handed.
- Internally Mounted Solenoid.
- Plug-in Connectors.
- 7000-105—"Goof Plate" Trim Enhancement Adapter.
- 106—Keeper Pocket Adapter.

Electrical

- 12 VDC Current Draw = .45 AMPS.
 - 24 VDC Current Draw = .25 AMPS.
- For AC operation, a 2001 plug-in rectifier should be used.

Options

- Model 2001—Plug-in Bridge Rectifier for AC Operation.
- Model 2005—SMART-Pac™ Plug-in Power Controller
- Model 2006P—Plug-in Buzzer
- Model 2009P—Plug-in L.E.D.

Finish

- 605—Bright Brass.
- 606—Satin Brass.
- 612—Satin Bronze.
- Blk—Nylon Black Coated.
- 613—Bronze Toned.
- 613C—Nylon Brown Coated.
- 628—Aluminum.
- 628C—Nylon Silver Coated.
- 630—Satin Stainless Steel (Standard).
- 651—Polished Chrome.
- 652—Satin Chrome.

How to Order

When placing an order specify:


1. Quantity
2. Model
3. Voltage
4. *AC or DC operation
5. Option
6. Finish
7. Optional Features
8. Accessories

Model	Option	Finish
7000 - 12DC - 701 - 630 - LBM		
Voltage	Optional	Optional
DC = Direct Current	Features	Features
*AC = Alternating Current		

*Note: When Specifying AC operation, a 2001 Plug-in Bridge Rectifier will be supplied with the unit.


7000-701 Option

For use with cylindrical latchbolts up to 5/8" throw.




Operation

After releasing the latchbolt, the keeper returns to the locked condition. Dimensions: 4-7/8" x 1-1/4" ANSI Jamb Prep. Depth into frame is 1-19/32". Ramp depth (cutout) is 1-3/16". The 701 option now includes a 7000-105 "Goof Plate."

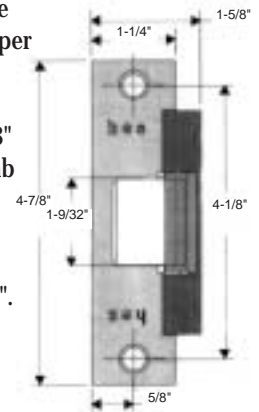


7000-702 Option

For use with cylindrical latchbolts up to 5/8" throw.



Operation

After releasing the latchbolt, the keeper returns to the locked condition. Dimensions: 7-15/16" x 1-7/16" wood or aluminum Jamb Prep. Depth into frame is 1-5/8". Ramp depth (cutout) is 1-7/32". The 702 option now includes a 7000-105 "Goof Plate."

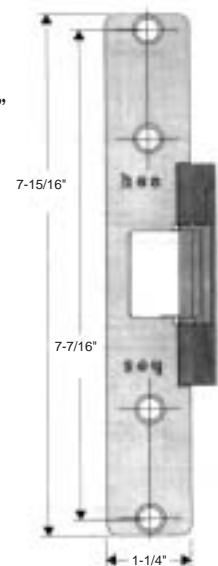

HANCHETT ENTRY SYSTEMS, INC.


7000 Series Low Profile Heavy Duty Electric Strikes

7000-783 Option

For use with rim mounted panic exit devices, with up to a 3/4" throw latchbolt.

Operation

After releasing the latchbolt, the keeper returns to the locked condition. Face Plate Dimensions: 9" x 1-3/4" x 1/2". Depth into frame is 1-3/16". Now with horizontal lock down screws standard.




7000-786 Option

For use with rim mounted panic exit devices and vertical rim mounted panic devices, up to 3/4" throw.

Operation

After releasing the latchbolt, the keeper returns to the locked condition. Face Plate Dimensions: 6-1/2" x 1-3/4" x 1/2". Depth into frame is 1-3/16". Now with horizontal lock down screws standard.




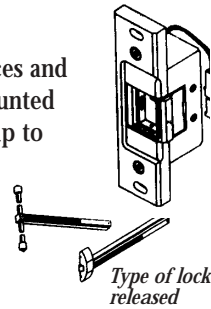


7000-789 Option

For use with rim mounted panic exit devices, up to 3/4" throw. Designed for aluminum jamb installations.

Operation


After releasing the latchbolt, the keeper returns to the locked condition. Face Plate Dimensions: 9" x 1-3/4" x 1/2". Depth into frame is 1-3/16". Now with horizontal lock down screws and keeper pocket adapter standard.

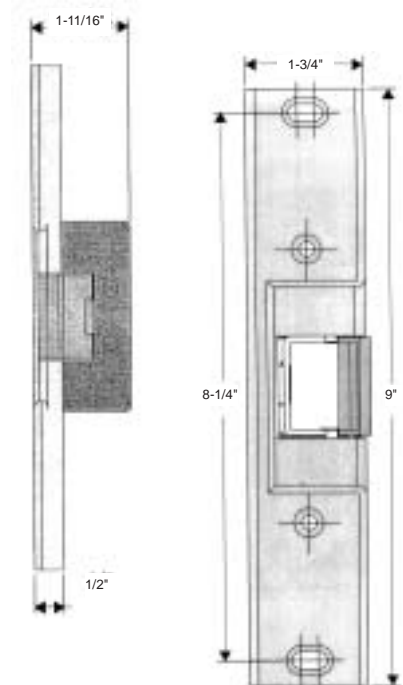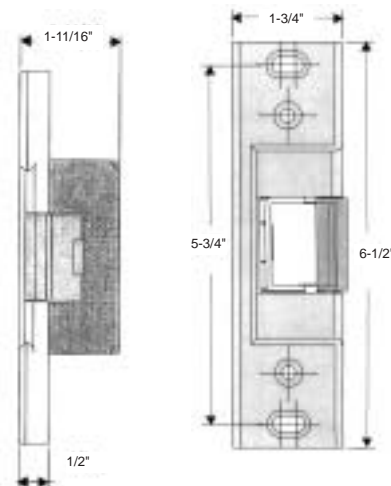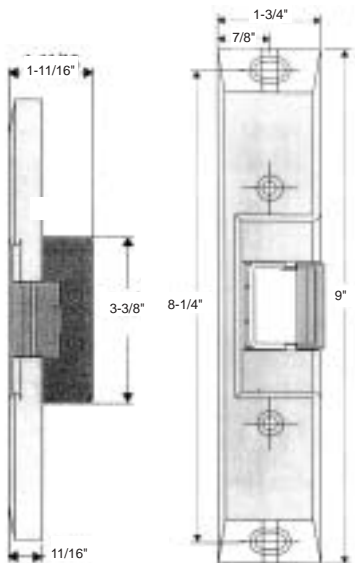


**7000-104 Extended Lip
Trim Adapter**



**7000-106 Keeper Pocket
Adapter**




**7000-105 Goof Plate Trim
Enhancement Adapter**



**7000-108 1/8" Spacer
Plate**



**7000-110 Replacement
Strike Plate**



*Note: Three items above are for use with 701
and 702 options only.*

**7000-783-SMB Surface
Mounting Box**

For use with 7083 option only. Mounts
on inactive door, of a pair of doors
without a mullion to accommodate a
rim mounted panic exit device.

