








Section Title

A NYC'S TOUGHEST ELECTRIC LOCKING

Featured Solutions

	Electrolatch
	Maglatch
	HPD & NYCHA Models
	Power Supplies & Transfers
	Enduralatch
	Everswitch Digital Keypads
	Electromagnetic Locks

Effective 01-01-11


vdate 01-01-11

v1

Table of Contents

Product	Model #s or Series		Page
Electrolatch & Maglatch			
UG Series Standard Models	9010, 9020, 9030	Info	A4
		Pricing	A5
NYC Special Models			
HPD	9012, 9032	Pricing	A6
&	9034, 9371, 9375,		
NYCHA	9381, 9382 & Others		
Power Supplies & Transfers			
Including Mini-Hinges, Yamaka	PS 105, ECH-FM, YMK-20	Pricing	A7
Enduralatch			
Standard Models	CFL	Info	A8
		Pricing	A9
Everswitch			
Digital Keypads	EWS	Info	A10
		Pricing	A11
Invisalock			
Electromagnetic Locks	EML-1002	Pricing	A12

ELECTROLATCH™
Vandal-Resistant Electrically Released Trim
With or Without Electromagnetic Lock
 Model Information

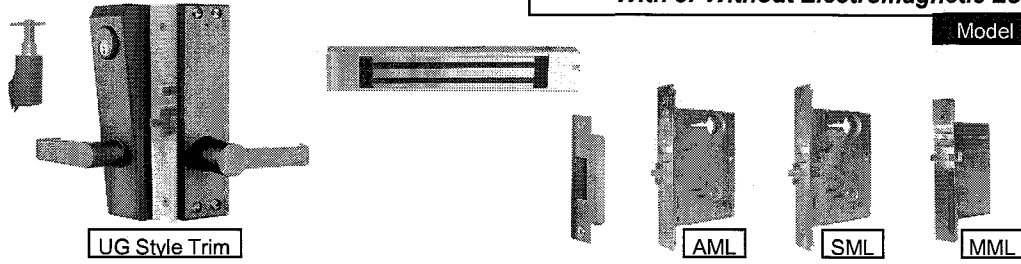

Model Info:	<p>Guardian: Non-electric, vandal-resistant key-released trim and mortise lock</p> <p>Electrolatch: Electrically or key-released trim and mortise lock</p> <p>Maglatch: Electrically or key-released trim, mortise lock and simultaneous electromagnetic lock release. Electromagnetic locks may be furnished with Maglatch or obtained separately</p>
Custom NYC Agency Models	See separate price list. Use of a non-compliant model voids warranty. HPD & NYCHA listed.
Mortise Lock Options	<p>AML - Standard Mortise Lockset (4-1/2" depth required), ANSI Prep (1-1/4" x 8") fire-rated</p> <p>SML - "Sargent" Mortise Lock (4-1/2" depth required), ANSI Prep (1-1/4" x 8") fire-rated</p> <p>MML - Mini-Mortise Lock (3" depth required), 1"x6-7/8" face plate</p>
Approvals	<p>Electrically-released trim is UL listed</p> <p>Maglatch is code-compliant and approved method for NYC Apartment Buildings (meets Local Law 76 requirements) with the required MEA listing</p>
Electric Information	<p>AC models require 24vAC, 30va. Will not operate with 20va transformers.</p> <p>Maglatch models require Securitech power supplies for proper operation.</p> <p>DC & RE models require 24vDC. RE models require continuous power for locking.</p>
Finish	<p>Standard finish is Black, #676. This is a powder coated application and is highly durable. The powder coating is textured to increase durability and scratch resistance.</p>
Adapatability	<p>MAGLATCH & ELECTROLATCH can be used with virtually all brands and types of:</p> <p>Card Readers, Digital Keypads, Intercoms, Remote Push-Buttons or other access control systems</p>
Operation	<p>Rotating the key in the cylinder momentarily unlocks the exterior lever handle.</p> <p>Pulling the lever handle downward retracts the latch (all modes) and releases the electromagnet (MAGLATCH).</p> <p>Electric release is momentary. The exterior handle re-locks when power is not applied.</p> <p>Re-Entry models: Power is required to keep handle locked. Loss of power releases the handle.</p>
Cylinder	<p>Standard length (1-1/8" to 1-1/4") mortise or high-security mortise cylinders may be used.</p> <p>1" length cylinders should not be used.</p>
Removable Core Cylinders	<p>If "Best" or other removable core cylinders are to be used, custom cylinder protectors should be ordered to allow core removal.</p>
Cam Information	<p>A cloverleaf cam allows the user to remove their hand from the key, pull the lever and open the door.</p> <p>Standard "Yale-type" cams can be used, but will not give one-hand operation. Short "Adams-Rite" cams should not be used.</p>
Strike Plate	4-7/8" ANSI Strike Plate provided
Door Preparation	<p>Door and frame templates are available from www.securitech.com</p> <p>Standard ANSI mortise and frame preps are required</p>
Power Transfer	<p><u>Electrolatch</u> requires 2 wires to be brought from the power supply to the hinge-side of the frame and the power transfer area. 2 wires are run from the power transfer to the lock area of the door.</p> <p><u>Maglatch</u> requires 4 wires to be brought from the power supply to the frame. Wires are run to the maglock and hinge or power transfer location. 4 wires are run to the lock area on the door.</p>
Warranty	<p>One year warranty against defects (excluding vandalism), unless otherwise noted.</p> <p>All solenoids and switches are guaranteed for FIVE years.</p>



**ELECTROLATCH™
& MAGLATCH™**
Vandal-Resistant Electrically Released Trim
With or Without Electromagnetic Lock

List Price 01-11v1

UG Series

Rugged NYC "SB" Tested Models

Maximum Ruggedness

All models must be ordered by swing (LH, RH, LHR, RHR)

Most popular models are boxed

Special NYCHA & NY HPD models listed separately (use of non-specified model voids warranty)

Series	Major Features	Model #	List Price
Guardian			
Mechanical			
<i>Non-Electric Models</i>	"A" Series Lock Body	9007-UG-AML	\$ 978
	"S" Series Lock Body	9007-UG-SM	1,086
	Mini-Mortise Lock Body	9007-UG-MML	924
<hr/>			
Electrolatch			
AC Electric Release			
<i>Electric Release (No Maglock Control)</i>	"A" Series Lock Body	9010-AC-UG-AML	1,125
	"S" Series Lock Body	9010-AC-UG-SM	1,233
	Mini-Mortise Lock Body	9010-AC-UG-MML	1,125
DC Electric Release			
	"A" Series Lock Body	9010-DC-UG-AML	1,125
	"S" Series Lock Body	9010-DC-UG-SM	1,233
	Mini-Mortise Lock Body	9010-DC-UG-MML	1,125
Re-Entry DC Release (Fail-Safe)			
	"A" Series Lock Body	9010-RE-UG-AML	1,176
	"S" Series Lock Body	9010-RE-UG-SM	1,284
	Mini-Mortise Lock Body	9010-RE-UG-MML	1,176
<hr/>			
Maglatch			
Electromagnetic Lock Control			
AC Electric Release			
<i>Electric Release With Maglock Control</i>	"A" Series Lock Body	9020-AC-UG-AML	1,407
	"S" Series Lock Body	9020-AC-UG-SM	1,506
	Mini-Mortise Lock Body	9020-AC-UG-MML	1,407
DC Electric Release			
	"A" Series Lock Body	9020-DC-UG-AML	1,407
	"S" Series Lock Body	9020-DC-UG-SM	1,506
	Mini-Mortise Lock Body	9020-DC-UG-MML	1,407
With 1,200lb. Electromagnetic Lock			
AC Electric Release			
	"A" Series Lock Body	9030-AC-UG-AML	1,974
	"S" Series Lock Body	9030-AC-UG-SM	2,082
	Mini-Mortise Lock Body	9030-AC-UG-MML	1,974
DC Electric Release			
	"A" Series Lock Body	9030-DC-UG-AML	1,974
	"S" Series Lock Body	9030-DC-UG-SM	2,082
	Mini-Mortise Lock Body	9030-DC-UG-MML	1,974

Accessories:

"Best"-type cylinder protector	9QS-RC	24
"Yale" IC core cylinder protector	9QS-YC	24

SECURITECH GROUP, INC. 800.622.LOCK 718.392.9000 718.392.8944fax www.securitech.com



NYC'S TOUGHEST ELECTRIC LOCKING


New York City HPD & Housing Authority Models
 Include custom options as specified by agencies
 All models must be ordered by swing (LH, RH, LHR, RHR)

ELECTROLATCH™ & MAGLATCH™
Vandal-Resistant Electrically Released Trim <i>Customized Models For NYC Agencies</i>

List Price 01-11

Series	Major Features	Model #	List Price
HPD Models			
Electrolatch	AC Electric Release "A" Series Lock Body Heavy-Duty Trim Bracket Package "A" Extended Warranty "B" Series	9012-AC-UG	\$ 1,200
Maglatch	AC Electric Release "A" Series Lock Body 1,200lb. Electromagnetic Lock MagChannel Heavy-Duty Trim Brackets Extended Warranty "B" Series	9032-AC-UG	2,184
Specified Power Supplies For HPD Applications:			
Maglatch	1 Door	PS105	508
Maglatch & Electrolatch	2 Doors; Simultaneous buzzing, extended interior	PS105-1S	660
Maglatch	2 Doors	PS106	660
Maglatch	2 Doors; Timed release for second door	PS106A	754
NYCHA Models			
Maglatch	AC Electric Release "A" Series Lock Body Custom 1,200lb. Electromagnetic Lock Redundant Switching Heavy-Duty Trim Bracket Package "B" Extended Warranty "C" Series	9034-HA-AC-UG	2,390
Specified Power Supplies For NYCHA Includes:			
Maglatch	With special NYCHA outputs (LED, audible terminal)	PC110-HA	847
NYCHA Exit Devices			
	All with special electromagnetic lock		
	Mortise, Exit Only	9371-HA-676	2,200
	Above with exterior UG trim	9375-HA-676	3,057
	Surface Vertical Rod, Exit Only	9381-HA-676	1,938
	Above with exterior UG trim	9382-HA-676	2,790
	Concealed Vertical Rod, Exit Only	9321-HA-676	1,993
	Above with exterior UG trim	9325-HA-676	2,878
Specified Power Supplies For NYCHA Exit Devices Includes:			
Exit Only Maglatch	Up to 2 exit only doors	PS100-2	448
Maglatch	1 Entrance door	PS105	508
Electric Bolt Retraction Models For Community Center Entrances			
	Surface Vertical Rod, UG Trim	9384-UG-EBR-KD-HA	3,915
	Surface Vertical Rod, rim cylinder only on exterior	9389-EBR-KD-HA	3,303
	Surface Vertical Rod, exit only	9381-EBR-KD-HA	3,303
	Surface Vertical Rod, UG Trim	9384-UG-EBR-KD-HA	3,915
	Surface Vertical Rod, rim cylinder only on exterior	9389-EBR-KD-HA	3,303
	Surface Vertical Rod, exit only	9381-EBR-KD-HA	3,303
Recommended Power Supply For Bolt Retraction (Regular Maglatch Power Supply Also Required)			
	Up to 2 doors	PS-EBR-100-2	645

SECURITECH GROUP, INC. 800.622.LOCK 718.392.9000 718.392.8944 fax www.securitech.com

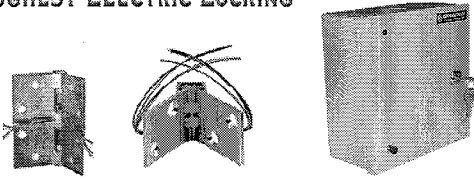

ELECTROLATCH™ & MAGLATCH™

110vAC POWER SUPPLIES & TRANSFERS
For Single & Double Door Applications

List Price 01-11

POWER SUPPLY		ELECTRIC RELEASE		ELECTRO-MAGNET	Test	AC	DC	24 Hr.	Time	Notes	List
		INPUT: WET	INPUT: DRY								
Model #	Door(s)										
PS 91-AC	1	•	•		•	•				for Electrolatch Series	370
PS 91-DC	1	•	•		•		•			for Electrolatch Series	370
PS105	1	•		•	•	•					508
PS105-1S	2	•		•	•	••				Extended time for 2nd door	660
PS106	2	•		••	•	••					660
PS106A	2	•		••	•	••			•	10 second delay for 2nd door	754
PS108-DC	2	•	•	••	•		••	•			779
PS109-DC	1	•	•	•	•		•	•			673

Power supplies providing 24vAC, 30va release for exterior lever handle units will "buzz" when releasing lever.
 Power supplies providing 24vDC, .25A release are silent (models ending in "DC")
 Power supplies provide 24vDC for electromagnetic locks, except PS-91 models.
 Power supplies also available for "DC" & "RE" exterior trim. Contact factory.
 Custom Power Supplies available to provide specific functions. Contact the factory with special requests.

Notes:

- 1) PS105-1S For 9032 & 9012; Both doors buzz simultaneously, then extended time for inner door
- 2) PS106A Outer door buzzes, then inner door buzzes after 10 seconds (delay is field adjustable)

ELECTRIFIED HINGES

Model #	Type	Finish	Length	Wires	Matches	List Price
GEARED ALUMINUM						
ECHFMR-(finish)-4	Full Mortise	-AL (clear) or -DU (duronodic)	1.5"	4	Roton 780-112	145
ECHFMZ-(finish)-4	Full Mortise	-AL (clear) or -DU (duronodic)	1.5"	4	Zero 910	145

Additional hinge types (full-surface, 1/2 mortise, different full mortise) available on special order
 Special: "-6" for 6 wire hinge; Length is 2"; Add \$50 to List Price.
 "-8" for 8 wire hinge; Length is 2"; Add \$100 to List Price.

FULL MORTISE BUTT HINGE

EH4545-626-4	Ball Bearing	Brushed Chrome	4-1/2"	4	Standard 4.5 prep	245
--------------	--------------	----------------	--------	---	-------------------	-----

Other Finishes, Additional Wires And Hinge Sizes On Special Order


Full selection of electrified hinges in in the Easy Electric Locking Price Book

Yamaka

Unique Top Of Door Power Transfer For Fail-Secure Applications

YMK-20	Power Transfer Module	Mounts in top of door; flat plate onto header	65
YMK-21	Power Transfer Module	Module mounts in frame with flat plate on door	75

Contact factory for power supplies and controllers for Mantraps, Sallyports, etc.
 A full range of customizable Entry & Exit Controls are available.

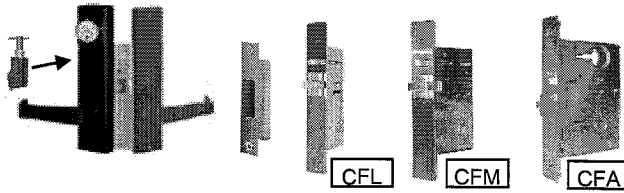

Model Information Mortise Lock Models

CFL: With Narrow-Stile Mortise Lock (2" depth required), 1" x 6-7/8" face plate

CFM: With Mini-Mortise Lock (3" depth required), 1-1/4" x 6-7/8" face plate

CFA: With Securitech "A" Series mortise lock (4-1/2" depth required), ANSI Prep (1-1/4" x 8") fire-rated

Mortise Lock Options AML - Standard Mortise Lockset (4-1/2" depth required)

SML- "Sargent" Mortise Lock (4-1/2" depth required)

MML- Mini-Mortise Lock (3" depth required)

Electric Information AC models require 24vAC, 30va. Will not operate with 20va transformers.

DC & RE models require 24vDC. RE models require continuous power for locking.

Finish Standard finish is 676. Other finishes available in ELECTRA series.

Adapatability Enduralatch can be used with virtually all brands and types of:

Intercoms, Card Readers, Digital Keypads and Remote Push-Buttons

Operation Rotating the key in the cylinder momentarily unlocks the exterior lever handle.

Pulling the lever handle downward retracts the latch.

Electric release is momentary. The exterior handle re-locks when power is not applied.

Re-Entry models: Power is required to keep handle locked. Loss of power releases the handle.

Request-To-Exit Function D21 & R21 Models feature a lever activated "Request-To-Exit" function. Depressing the lever sends a signal to the access control system. This eliminates the need for P-I-Rs and separate buttons.

Cylinder Standard length mortise or high-security mortise cylinders may be used.
 1" length cylinders should not be used.

Removable Core Cylinders "Best" and other removable core cylinders may be used.

Cam Information A cloverleaf cam allows the user to remove their hand from the key, pull the lever and open the door. Standard "Yale-type" cams can be used, but will not give one-hand operation. Short "Adams-Rite" cams should not be used.

Strike Plate 4-7/8" ANSI Strike Plate provided

Door Preparation Door and frame templates are available from www.securitech.com
 Standard "AdamsRite" prep for narrow-stile doors and gates (CFL)
 Standard ANSI mortise and frame preps (CFA)

Power Transfer D11 & R11 models require 2 wires to be brought from the power supply to the hinge-side of the frame and the power transfer area. 2 wires are run from the power transfer to the lock area of the door. D21 & R21 require 4 wires.

Warranty One year warranty against defects (excluding vandalism), unless otherwise noted.
 All solenoids and switches are guaranteed for FIVE years.

Additional Options & Functions Enduralatch is designed to work with intercoms and as a component of an access control system.
 Options & functions include: Classroom Function, Request-To-Exit, Mechanical Only.

Lever Style Levers contain return to meet ADA requirements.




ENDURALATCH™

Durable Electrically Released Trim
For Narrow-Stile Aluminum & Other Doors

List Price 01-11


CFL Control Trim - L10 Trim & Lever Style
Includes Narrow-Stile, Mini-Mortise or "A" Series Lock
With Durable, ADA Compliant Lever
CFL Levers do not contain a slip-clutch



Model & Price Information



CFL Series



CFM Series



CFA Series

Release Option/Function	Narrow-Stile	List Price	Medium-Stile	List Price	Full Lockset	List Price
-------------------------	--------------	------------	--------------	------------	--------------	------------

Single Entry, Fail-Secure

24vDC Release	CFL-L10-D11-676	\$ 695	CFM-L10-D11-676	\$ 695	CFA-L10-D11-676	\$ 760
24vDC with Request-To-Exit Signal	CFL-L10-D21-676	760	CFM-L10-D21-676	760	CFA-L10-D21-676	825
24vAC Release	CFL-L10-A11-676	695	CFM-L10-A11-676	695	CFA-L10-A11-676	760
24vAC with Request-To-Exit Signal	CFL-L10-A21-676	760	CFM-L10-A21-676	760	CFA-L10-A21-676	825
Mechanical Only	CFL-L10-M10-676	615	CFM-L10-M10-676	615	CFA-L10-M10-676	680
Mechanical with Request-To-Exit Signal	CFL-L10-M20-676	680	CFM-L10-M20-676	680	CFA-L10-M20-676	745

Classroom Function By Key (Fail-Secure)


24vDC Release	CFL-L10-D31-676	730	CFM-L10-D31-676	730	CFA-L10-D31-676	795
24vDC with Request-To-Exit Signal	CFL-L10-D41-676	795	CFM-L10-D41-676	795	CFA-L10-D41-676	860
24vAC Release	CFL-L10-A31-676	730	CFM-L10-A31-676	730	CFA-L10-A31-676	795
24vAC with Request-To-Exit Signal	CFL-L10-A41-676	795	CFM-L10-A41-676	795	CFA-L10-A41-676	860
Mechanical Only	CFL-L10-M30-676	650	CFM-L10-M30-676	650	CFA-L10-M30-676	715
24vAC with Request-To-Exit Signal	CFL-L10-M40-676	715	CFM-L10-M40-676	715	CFA-L10-M40-676	780

Re-Entry, Fail-Safe

24vDC Continuous Power For Locking	CFL-L10-R11-676	735	CFM-L10-R11-676	735	CFA-L10-R11-676	800
Above with Request-To-Exit Signal	CFL-L10-R21-676	795	CFM-L10-R21-676	795	CFA-L10-R21-676	860

Mortise Lock Usage

for 2" stile iron or alum. tube	for 3-1/4" medium stile alum. tube	for regular doors or wide-stile aluminum	
CFL	CFM	CFA	A Ser
fits "Adams-Rite" type faceplate	Mini-Mortise 1-1/4"x 6-7/8"	A Ser 1-1/4" faceplate ANSI Fire-Rated	YAMAHA Power Transfer Recommended For Aluminum Doors



**EVERSWITCH
DIGITAL KEYPADS**

Solid State Piezo Technology
Maximum Durability & Vandal-Resistance

Model Information

- The most reliable and easy to program digital keypads in The world featuring patented piezo technology
- Anodized Graphics won't wear off
- Lifetime warranty

Building a model number requires the following steps:

1. Select Keypad Series & Output
 - a. Standalone
 - b. 2-part controller based
 - c. Weigand output
 - d. Prox reader & keypad
2. Select Size
 - a. 2"x6"
 - b. 3"x4"
3. Select Mounting Method
 - a. surface
 - b. mortise

See the chart for options by series

Series & Description		Keypad Layout	Keypad Mounting	Output
ES	Standalone Keypad	2x6	surface	form c
			mortise	form c
		3x4	surface	form c
EC	Controller (2-Part) Keypad <i>Controller to be mounted within 15 feet of keypad; cable provided</i>	2x6	surface	form c
			mortise	form c
EW	Keypad with Weigand -26bit output	2x6	surface	26 bit
			surface	26 bit
EV	Keypad with Weigand -8bit output	2x6	surface	8 bit
			surface	8 bit
EP	Keypad and Prox Reader with Weigand -26bit output	3x4	surface	26 bit
EQ	Keypad and Prox Reader with Weigand -8bit output	3x4	surface	8 bit

All Models Feature:

- Solid State EVERSITCH Piezo Technology In Keypad
- Seamless Metal Case
- Weather proof -4F to 158F (IP68)
- Water and dust proof (IP68)
- Tamper Proof
- Operational at -20 0C to + 85 0C
- Two* LEDs and Buzzer

Dimensions (approx.)

Keypad	width	height	depth
2x6	1-3/4"	7-1/8"	7/8"
3/x4	3-1/4"	5-1/8"	3/4"
3x4 prox	3-1/2"	4-3/4"	3/4"
Controller	4-3/8"	7-7/8"	2"

Standalone Models Feature:

- Works on 12VAC or 12-24VDC Power
- Up to 200 User Codes -100 Million Combinations
- EEPROM - Non Volatile Memory
- Microcontroller "Watchdog" Circuit
- Visual & Audible Feedback
- Tamper-Proof Mounting
- Heavy-Duty Form C Relay

Controller Models Feature:

- All Standalone Features
- Door ajar and Forced entry relays
- Door ajar and Forced entry alarm
- Request to exit (Rex) switch
- Call attendant bell
- Terminals for back up batteries

Weigand Output Models Feature:

- Choice of 26 bit or 8 bit Output
- Other outputs available; contact factory
- Voltage requirement: 12-28vDC

Prox Models Feature:

- Proximity reader encryption - HID
- Reading Range - 50mm
- Choice of Weigand Output
- Voltage requirement: 5-12VDC


EVERSWITCH
DIGITAL KEYPADS
 Solid State Piezo Technology
 Maximum Durability & Vandal-Resistance

List Price 01-09

Vandal-Resistant Stainless Steel Housings


Patented Piezo Technology
 Anodized Graphics Won't Wear Off
 Lifetime Warranty

Illustration	Group	Details	Model #	List Price
--------------	-------	---------	---------	------------




Mounting: To Single Gang Box

Controller & Output	Standalone - "Form C Relay"	ESS-341X-AA	461
	Remote Controller* - "Form C Relay"	ECS-341X-AA	562
Non-Controller Models	26 bit output	EWS-341X-AA	413
	8 bit output	EVS-341X-AA	413




Mounting: To Frame Or Wall

Controller & Output	Standalone - "Form C Relay"	ESS-261X-AA	461
	Remote Controller* - "Form C Relay"	ECS-261X-AA	562
Non-Controller Models	26 bit output	EWS-261X-AA	360
	8 bit output	EVS-261X-AA	360



Mounting: To Frame Or Wall, With Mortise

Controller & Output	Standalone - "Form C Relay"	ESM-261X-AA	461
	Remote Controller* - "Form C Relay"	ECM-261X-AA	562



SPECIAL KEYPAD & PROX UNIT

Mounting: To Single Gang Box

Non-Controller Models	26 bit keypad output	EPS-341X-AA	726
	8 bit keypad output	EQS-341X-AA	726

PROX: 26 bit pass through on both units

Important Wear & Tear Info: Numbers printed via anodization: no wear-off

* Cable provided to mount Remote controller within 15 ft. of door

Specials:

Additional finishes available: contact factory

Different outputs (matrix, row and column, common bus) available



INVISALOCK™
Electromagnetic Locks
1200lb. Holding Force - Narrow Design

List Price 01-11


- 1,200 lb. Holding Force**
 - Security & Vandal-Resistance
- Narrow Projection & Shallow Height**
 - Greater Headroom & Neater Appearance
- Built-In Transient Suppression System**
 - Component & Circuit Protection
- 10 Year Limited Warranty**



One Piece Housing Cover For Easy Installation

Low Current Draw: Only 1/4 Amp At 24vDC

Model	Description	List Price
EML-1002	Single door 1200 lb. Electromagnetic Lock 12/24vDC (Dual voltage - Field Selectable)	\$ 536.00



Add the following designation(s) for each option desired:

-MB Magnetic Bond Sensor	149.00
-DS Door Position Switch (Single) (SPDT)	149.00
-L LED (Bi-Color Red/Green)	48.00
-SF Tamper Resistant Screws & Screwdriver Bit	20.00
-CF Conduit Fitting (for 1/2" rigid conduit)	16.00

Standard Dimensions	
Length:	12-1/2"
Height:	2"
Depth:	1-13/16"

Electrical Information	
Voltage:	24vDC
Current Draw:	290mA
Resistance:	82 Ohms

Wiring Connections			
Magnet Power		Blue (2)	
Red	N/C	Red	N/C
White	N/O	White	N/O
Green	Common	Black	Common
Switch positions are with door closed			

Available Options

- MB** Magnetic Bond Sensor
2 SPDT magnetic reed sensors within electromagnet monitor security status by verifying degree of bonding between magnet and armature.
- DS** Door Status Switch
1 SPDT magnetic reed switch within a plastic case is fastened to one end of the magnet, and concealed within the cover. Senses open and closed door position.
- L** LED
BI-COLOR Red & Green
- SF** Security Fasteners
Provides security fasteners (torx) and screwdriver
- CF** Conduit Fitting
Includes fitting for 1/2" conduit

Custom Finishes

- Contact Factory For Pricing
- xDBA-Dark Bronze Anodize
 - xGBA-Gold Bronze Anodize
 - xSBA-Black Satin Anodized
 - xUS3-Polished Brass
 - xUS4-Satin Brass
 - xUS26-Polished Chrome
 - xUS26D-Satin Chrome

