

M38 SERIES

600lbs Holding Force

Bracket Mounted with Easy Installation for Interior Applications

The M38 electromagnetic lock is ideal for traffic control in high-use areas within secured or monitored perimeters. Offerings include solutions for interior rooms, closets and hallways where reliability, high durability and low-maintenance are required. Bracket mounting and wiring chamber provide quick, accurate installation.



PRODUCT FEATURES

- Bracket mounts easily using common tools
- Internal wire access chamber
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- (S) Senstat
- (D) Integrated door position switch (DPS)
- (L) LED indicator
- (T) Anti-tamper switch

SPECIFICATIONS

- UL 10C Listed
- CAN4-S104, CAN/ULC-SS53 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA A156.23, Grade 1; E18501-500
- CSFM - California State Fire Marshal Approved
- CE:EN 50081-1(92), EN 61000-6-2(99) Approved

Holding Force:

600lbs [272kg]

Dimensions:

Magnalock: 10-1/2" L x 1-11/16" D x 2-1/2" H
Strike: 6-1/4" L x 1/2" D x 1-5/8" H

Electrical:

350mA at 12VDC
170mA at 24VDC

Operating Temperature:

+32 to +110F [0 to +43C]
Indoor use only

Shipping Weight:

8lbs [3.63kg]

Finishes:



US28/628 - Brushed Aluminum

» MODELS

PART # | Description

M38	Magnalock® Model 38
M38D	M38, DPS
M38DL	M38, DPS, LED
M38DLS	M38, DPS, LED, Senstat
M38DLST	M38, DPS, LED, Senstat, Tamper
M38DS	M38, DPS, Senstat
M38LS	M38, LED, Senstat

For dress covers and flexible mounting brackets, see page 19.

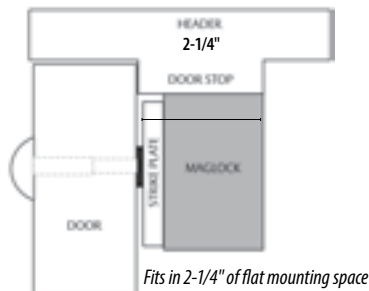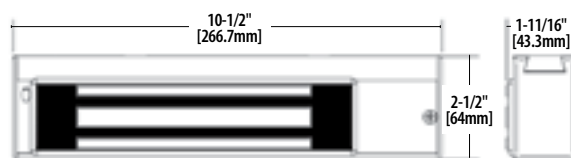

DUAL VOLTAGE



GRADE 1



FIRE RATED

SECURITRON
ASSA ABLOY