


1006 Series Faceplate Options



Operation: After releasing the latchbolt, the keeper returns to the locked position




4-7/8" x 1-1/4"


LB Option

The Latchbolt Solution: Includes all hardware to accommodate every cylindrical and mortise lock up to a 3/4" latchbolt.
Replaces function of the J, K, KM and KD Options

» ANSI/BHMA Numbers: E09321, E09322, E09323

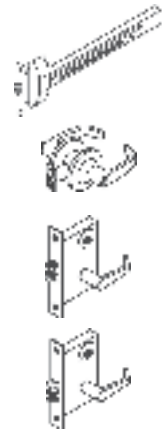

Operation: This deadbolt solution offers three modes of functionality; night latch, lockout, and normally extended deadbolt. (Functional operation modes described below.)



4-7/8" x 1-1/4"

DB Option

The Deadbolt Solution: Includes all hardware to retain, release and recapture all mortise locks, and tubular deadbolts up to a 1" latchbolt

Mode 1: Night latch function. The deadbolt is retracted during traffic hours. The latchbolt is released by the keeper and keeper returns to the locked position.

Mode 2: Lockout function. The electric strike will not release if the deadbolt is extended.


Mode 3: Normally extended deadbolt. Latchbolt and deadbolt are released by a single keeper. The keeper is held open to recapture the latchbolt and deadbolt when the door is closed.

Replaces function of the N, ND, NM, A, AM, AD, T, TD, H, HD, HM, HT, and HTD options

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



Operation: After releasing the latchbolt or deadbolt the keeper returns to the locked position



4-7/8" x 1-1/4"

E Option

For use with: Corbin Russwin Security Bolt, Weiserbolt and normally extended 1" tubular deadbolts


» ANSI/BHMA Numbers: E09391, E09392, E09393



1006 Series Faceplate Options



Operation: The hookbolt is released by a single keeper. The keeper is held open to recapture the latchbolt and hookbolt when the door is closed.



4-7/8" x 1-1/4"

R Option

For use with: Adams Rite style hookbolt up to 1" throw

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09332, E09333



Operation: After releasing the latchbolt, the keeper returns to the locked position



4-7/8" x 1-1/4"

Z Option

For use with: Unit and Mono locks

» ANSI/BHMA Numbers: E09321, E09322, E09323



Operation: After releasing the latchbolt, the keeper returns to the locked position



9" x 1-3/8"

J-2 Option

For use with: All cylindrical locks up to a 3/4" latchbolt

» ANSI/BHMA Numbers: E09321, E09322, E09323



Operation: After releasing the latchbolt, the keeper returns to the locked position



9" x 1-3/8"

KM-2 Option

For use with: Mortise locksets up to a 3/4" latchbolt

» ANSI/BHMA Numbers: E09321, E09322, E09323



Continued on next page »

1006 Series Faceplate Options



Operation: This deadbolt solution offers three modes of functionality; night latch, lockout, and normally extended deadbolt. (Functional operation modes described below.)



9" x 1-3/8"

DB-2 Option

The Deadbolt Solution: Includes all hardware to retain, release and recapture all mortise locks, and tubular deadbolts up to a 1" latchbolt

Mode 1: Night latch function. The deadbolt is retracted during traffic hours. The latchbolt is released by the keeper and keeper returns to the locked position.

Mode 2: Lockout function. The electric strike will not release if the deadbolt is extended.

Mode 3: Normally extended deadbolt. Latchbolt and deadbolt are released by a single keeper. The keeper is held open to recapture the latchbolt and deadbolt when the door is closed.

Replaces the N-2, A-2, T-2, and H-2 options

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



Operation: After releasing the latchbolt, the keeper returns to the locked position



4-7/8" x 1-1/4"

J Option

For use with: Cylindrical locksets up to 3/4" throw and all locksets with center-lined bolts

Compatible locksets: All brands of cylindrical latchbolts

» ANSI/BHMA Numbers: E09321, E09322, E09323



Operation: After releasing the latchbolt, the keeper returns to the locked position



4-7/8" x 1-1/4"

KD Option

For use with: Mortise locksets up to 3/4" throw latchbolt

Compatible locksets: Dorma 9500, Jackson, Sargent (7700 & 8100), Schlage, Yale (8700)

» ANSI/BHMA Numbers: E09321, E09322, E09323



4-7/8" x 1-1/4"

KM Option

For use with: Mortise locksets up to 3/4" throw latchbolt

Compatible locksets: Accurate, Arrow, Baldwin, Best, Corbin Russwin, Falcon, Marks, PDQ, Sargent (7800, 8200 & 9200), Yale (8800)

» ANSI/BHMA Numbers: E09321, E09322, E09323



1006 Series Faceplate Options



Operation: Latchbolt and deadbolt are released by a single keeper. The keeper is held open to recapture the latchbolt and deadbolt when the door is closed.



4-7/8" x 1-1/4"

AD Option

For use with: Mortise locksets with a normally extended 1" deadbolt

Compatible locksets: Sargent (7700 & 8100), Schlage, Yale (8700)

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



4-7/8" x 1-1/4"

AM Option

For use with: Mortise locksets with a normally extended 1" deadbolt

Compatible locksets: Accurate, Arrow, Baldwin, Best, Corbin Russwin, Falcon (45H, 47H, 34H & 37H), Marks, Omnia, PDQ, Sargent (7800, 8200 & 9200), Yale (8800)

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



Operation: Lockout function. The electric strike will not release if the deadbolt is extended. The deadbolt is retracted during traffic hours. The latchbolt is retracted by the keeper. The keeper returns to the locked position.



4-7/8" x 1-1/4"

HM Option

For use with: Mortise locksets with a 1" deadbolt. Strike will not release when deadbolt is extended

Compatible locksets: Accurate, Arrow, Baldwin, Best, Corbin Russwin, Falcon (45H, 47H, 34H & 37H), Marks, Omnia, PDQ, Sargent (7800, 8200 & 9200), Yale (8800)

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



4-7/8" x 1-1/4"

HTD Option

For use with: Mortise locksets with a 1" deadbolt and no deadlatch or a center positioned deadlatch. Strike will not release when deadbolt is extended

Compatible locksets: Sargent (7700 & 8100), Schlage, Yale (8700)

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



Continued on next page »

1006 Series Faceplate Options



Operation: Night latch function. The deadbolt is retracted during traffic hours. The latchbolt is released by the keeper and keeper returns to the locked position.



4-7/8" x 1-1/4"

ND Option

For use with: Mortise locksets with a deadbolt used for night latch function only

Compatible locksets: Sargent (7700 & 8100), Schlage, Yale (8700)

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



4-7/8" x 1-1/4"

NM Option

For use with: Mortise locksets with a deadbolt used for night latch function only

Compatible locksets: Accurate, Arrow, Baldwin, Best, Corbin Russwin, Falcon (45H, 47H, 34H & 37H), Marks, Omnia, PDQ, Sargent (7800, 8200 & 9200), Yale (8800)

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



Operation: Latchbolt and deadbolt are released by a single keeper. The keeper is held open to recapture the latchbolt and deadbolt, and the deadlatch is engaged when the door is closed.




4-7/8" x 1-1/4"

T Option

For use with: Mortise locksets with a normally extended 1" deadbolt and center-lined deadlatch

Compatible locksets: Accurate, Arrow, Baldwin, Marks, Omnia, PDQ, Schlage

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



4-7/8" x 1-1/4"

TD Option

For use with: Mortise locksets with a normally extended 1" deadbolt and center-lined deadlatch

Compatible locksets: Sargent (7700 & 8100), Schlage, Yale (8700)

» ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333



The following legacy faceplate options remain available for order. Suggestions are provided below for more versatile options.

A Option replaced by **AM Option**
 H Option replaced by **HM Option**
 HD Option replaced by **HTD Option**
 HT Option replaced by **HTD Option**
 K Option replaced by **KM Option**
 N Option replaced by **NM Option**

K-2 Option combined into **KM-2 Option**
 A-2 Option replaced by **DB-2 Option**
 H-2 Option replaced by **DB-2 Option**
 N-2 Option replaced by **DB-2 Option**
 T-2 Option replaced by **DB-2 Option**