



**PG10**  
**Exit Alarm**

- Non locking alarm.
- Can be key bypassed.
- Solid state circuitry.
- Battery powered, 6V battery pack included.
- Shut off with key only.
- Accepts 1-1/8" mortise cylinder inside, rim cylinder outside. Not furnished.
- Surface mounted.
- Battery test button.
- 10"W x 8-1/2"H x 3-1/4" D.
- Finish: Silver Baked Enamel.

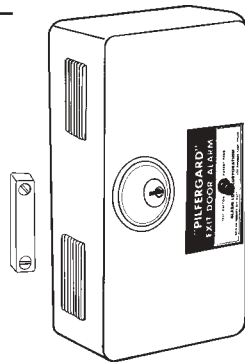


**700, 710**  
**Emergency Bar & Channel Panic Alarm**

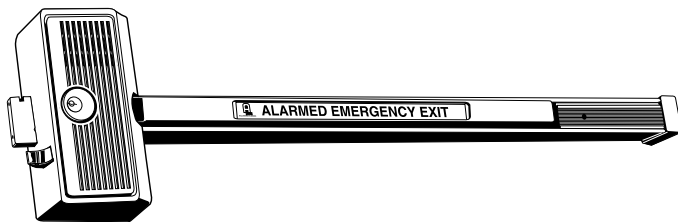

- 1" Deadbolt with hardened steel insert.
- Arming/access by inside mortise cylinder or outside rim cylinder (not furnished). Narrow stile doors do not allow outside operation.
- Disarming beep when unlocked by key.
- Slight pressure on bar allows exit & sounds alarm.
- 700: Selectable 2 min. alarm cutoff or manual reset.
- 710: Selectable 2 min. auto reset or manual restore.
- Non handed for use with 3 foot single or double doors. Use 48" unit for wider or narrow stile doors.
- Extruded aluminum channel with steel pushbar.
- 9VDC alkaline battery operated with a low battery alert.
- Dogging function.
- Loud dual piezo horn.
- Aluminum finish.
- Meets relatching requirements.
- U.L. listed.

**11A**  
**Emergency Exit Alarm**

- Provides full time locking of emergency exit doors.
- Pressure on paddle allows immediate exit and sounds alarm.
- Key resets alarm.
- 6V battery powered. (BP6 battery pack furnished).
- Accepts standard rim cylinder (not furnished).
- Outside rim cylinder requires 3-1/2" minimum length tailpiece for 1-3/4" door (optional).
- Pre-drilled mounting plate for easy installation on all doors.
- Surface mounting, no mortising required.
- U.L. Listed.

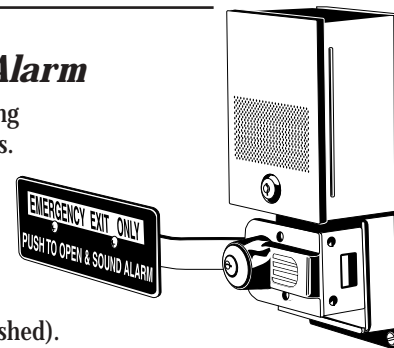


**BP6**  
**Battery Pack**

- 6V battery pack for use with 11A Exit Alarm.

**250, 260**  
**Electronic Panic Alarm**


- 1" Deadbolt with hardened steel insert.
- Deadbolt can be operated from outside.
- Can be used for single or double doors.
- Slight pressure on bar allows exit & sounds alarm.
- 250: Selectable 2 min. alarm cutoff or manual reset.
- 260: Selectable 2 min. auto reset or manual restore.
- Disarming beep when unlocked by key.
- Retriggerable alarm after 2 min.
- Requires standard rim cylinder (not furnished).
- 18"H x 8-1/2"W x 3-1/4" D (24"W when using extended clapper plate).
- Non handed.
- Low battery (9V) alert.
- Loud dual piezo horn.
- Aluminum finish.
- Also available in duranodic.
- Meets relatching requirements.
- U.L. listed.

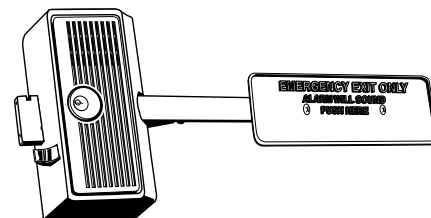

## ALARM LOCK

### *Electric Locks, Exit Alarms and Accessories*

#### **103, 104RA Electrified Deadbolt Lock**

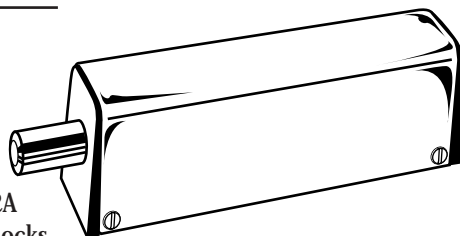

Models 103, and 104RA are compact electric locks that are simple to install on all types of doors. The door is locked or unlocked by remote switch, key switch, time programmer or other electrical contact which interrupts or sends the power.

- Designed to fit narrow stile doors inswinging or outswinging.
- 103 – The bolt projects and locks door only with power on and retracts when power fails or is switched off for ingress or egress.
- When the power is off the bolt retracts.
- 104RA – reverse action.

#### **Specifications**

**Power:** 24VAC. Draw is 400 MA.  
12VDC is also available. Draw is 800 MA.

**Operation:** Bolt is retracted and the door unlocked by means of a remote switch or key switch. Locking bolt is actuated by a continuous duty solenoid. Automatic relocking after entry or exit.

**Size:** 1-3/4"W x 6-3/4"L.


**Bolt:** 5/8" diameter and 5/8" throw.

**Strike:** Includes all three; Angle, Mortise and Flush.

**Finish:** 32D Stainless steel.

#### **PG21, PG21E Exit Door Alarm**


- Used with existing door locks or exit devices. Flashing LED when alarm is activated.
- Auto shut off/reset or continuous alarm.
- Programmable 15 second exit or entry delay.
- Accepts 1-1/8" mortise cylinder inside, rim cylinder outside (not furnished).
- 9-1/2" x 2" x 2-1/8".
- Suitable for narrow stile doors.
- 9V battery powered with a low battery alert.
- PG21E has advanced "Max-Flex" terminals.
- PG21 finishes: silver, red, or bronze.
- PG21E finish: metallic silver.

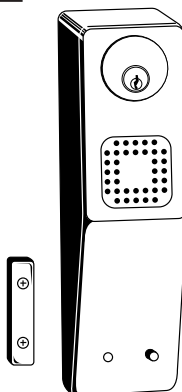

#### **PG30MB, PG30MS Exit Door Alarm**


Top of the line keypad controlled narrow stile alarm featuring the following advanced features:

- Visual magnetic alignment mode, eliminates templates.
- Convenient plug-in no-cut jumpers.
- Self-contained and dual-tamper supervised.
- Digital codes for Master, Management and Passage (used for Auto-Arming).
- 3 security levels for a) high security, b) unattended applications, and c) flexible control for delivery doors, etc.
- 9V battery powered with audible low battery warning.
- 3 programmable 95db siren styles: sweep, pulsed and steady.
- Logo key is dual function test button.
- Available in metallic silver (PG30MS) or metallic bronze (PG30MB) finishes.

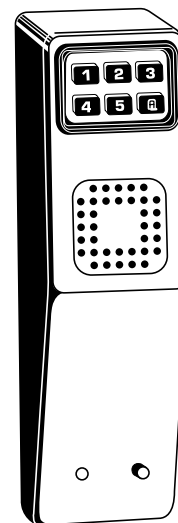

#### **PGKPD PG30 keypad**

For optional use with PG30, this low profile, brushed aluminum finished keypad provides all functions of the PG30 from the outside of the door.



#### **271MS Armored Door Loop**

- Brings electric current from hinge side of door frame to door.
- 18" armored flexible cable.
- End brackets anodized aluminum to conceal wire connections.

